

N-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☑ Surface-mounted package
- ☑ Advanced trench cell design



1.2 Applications

- ☑ LCD TV appliances
- ☑ LCDM appliances
- ☑ High power inverter system

1.3 Quick reference

- ☑ $BV \geq 120\text{ V}$
- ☑ $P_{tot} \leq 375\text{ W}$
- ☑ $I_D \leq 260\text{ A}$
- ☑ $R_{DS(ON)} \leq 2.2\text{ m}\Omega @ V_{GS} = 10\text{ V}$
- ☑ $R_{DS(ON)} \leq 2.8\text{ m}\Omega @ V_{GS} = 6\text{ V}$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
1	Gate(G)	 Top View TOLL	
2,3,4,5,6,7,8	Source(S)		
9	Drain(D)		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	Drain-Source Voltage	$T_C = 25\text{ }^{\circ}\text{C}$	-	120	V
V_{GS}	Gate-Source Voltage	$T_C = 25\text{ }^{\circ}\text{C}$	-	± 20	V
I_D^*	Drain Current (DC)	$T_C = 25\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	260	A
		$T_C = 100\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	185	A
I_{DM}^*	Drain Current (Pulsed)	$T_C = 25\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	1040	A
P_{tot}	Drain power dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	-	375	W
T_{stg}	Storage Temperature		-55	175	$^{\circ}\text{C}$
T_J	Junction Temperature		-	175	$^{\circ}\text{C}$
I_S	Continuous-Source Current	$T_C = 25\text{ }^{\circ}\text{C}$	-	260	A
E_{AS}	Single Pulsed Avalanche Energy	$V_{DD}=50\text{ V}, L=1.0\text{ mH}$	-	2450	mJ
$R_{\theta JA}^{**}$	Thermal Resistance- Junction to Ambient		-	45	$^{\circ}\text{C/W}$
$R_{\theta JC}^{**}$	Thermal Resistance- Junction to Case		-	0.4	

Notes :

- * Pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$
- ** Surface Mounted on 1 in^2 pad area, $t \leq 10\text{ sec}$
- *** Limited by bonding wire

4. Marking Information

Product Name	Marking
UP01N12T	

5. Ordering Code

Product Name	Package	Reel Size	Tape width	Quantity	Note
UP01N12T	TOLL-8L			2000	

6. Electrical Characteristics (T_A = 25 °C Unless Otherwise Noted)





Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _{DS} = 250 μA	120	-	-	V
ΔBV _{DSS} /ΔT _J	Breakdown Voltage Temp. Coefficient	Reference to 25°C , I _{DS} = 5 mA	-	0.062	-	V/°C
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _{DS} = 250 μA	2	-	4	V
I _{DSS}	Drain Leakage Current	V _{DS} = 96 V, V _{GS} = 0 V	-	-	1	μA
I _{GSS}	Gate Leakage Current	V _{GS} = 0 V, V _{GS} = ± 20 V	-	-	±100	nA
R _{DS(ON)} ^a	On-State Resistance	V _{GS} = 10 V, I _{DS} = 50 A	-	2.0	2.2	m Ω
		V _{GS} = 6 V, I _{DS} = 30 A	-	2.5	2.8	
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} = 50 A, V _{GS} = 0 V	-	-	1.3	V
t _{rr}	Reverse Recovery Time	I _{DS} = 50 A, V _{GS} = 0 V dI _{SD} /dt = 100 A/μs	-	137	-	nS
Q _{rr}	Reverse Recovery Charge		-	474	-	nC
Dynamic Characteristics ^b						
C _{iss}	Input Capacitance	V _{GS} = 0 V, V _{DS} = 60 V Frequency = 1 MHz	-	11834	-	pF
C _{oss}	Output Capacitance		-	1350	-	
C _{rss}	Reverse Transfer Capacitance		-	78	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} = 60 V, V _{GEN} = 10 V, R _G = 3.9 Ω, R _L = 1.2 Ω, I _{DS} = 50 A	-	30	-	nS
t _r	Turn-on Rise Time		-	102	-	
t _{d(off)}	Turn-off Delay Time		-	143	-	
t _f	Turn-off Fall Time		-	101	-	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{DS} = 60 V, V _{GS} = 10 V, I _{DS} = 50 A	-	213	-	nC
Q _{gs}	Gate-Source Charge		-	62	-	
Q _{gd}	Gate-Drain Charge		-	54	-	

Notes :

a : Pulse test ; pulse width ≤ 300 μs, duty cycle ≤ 2%


b : Guaranteed by design, not subject to production testing

7. Typical Characteristics

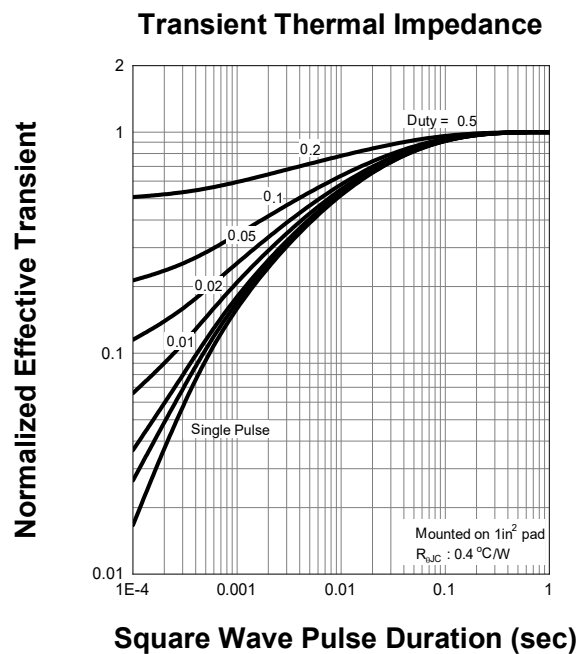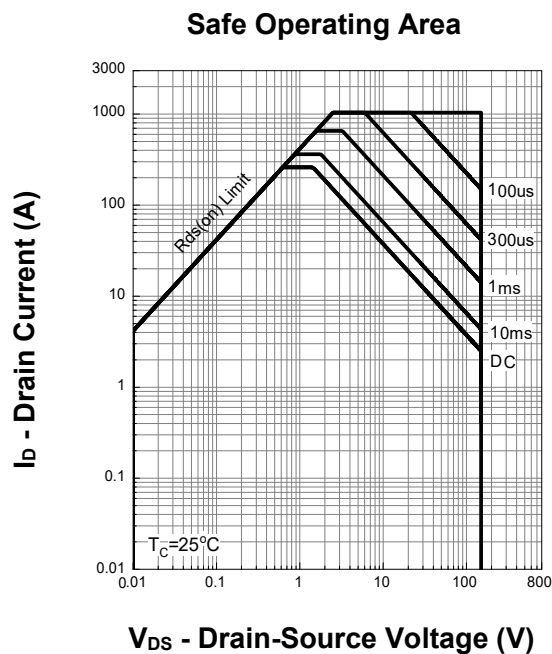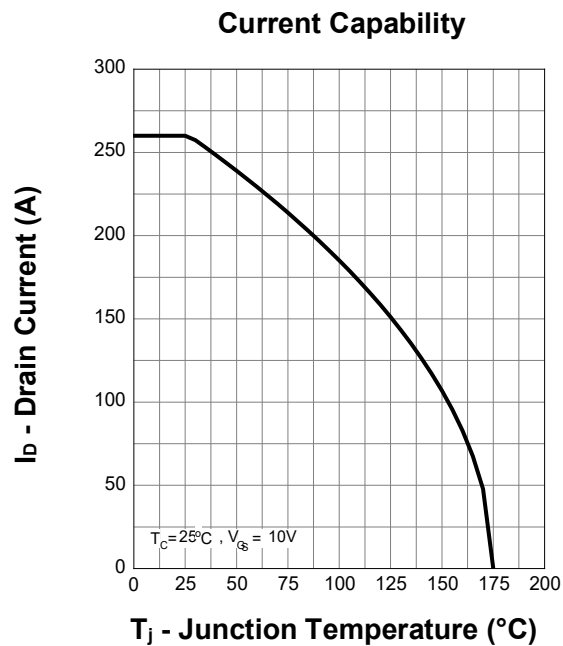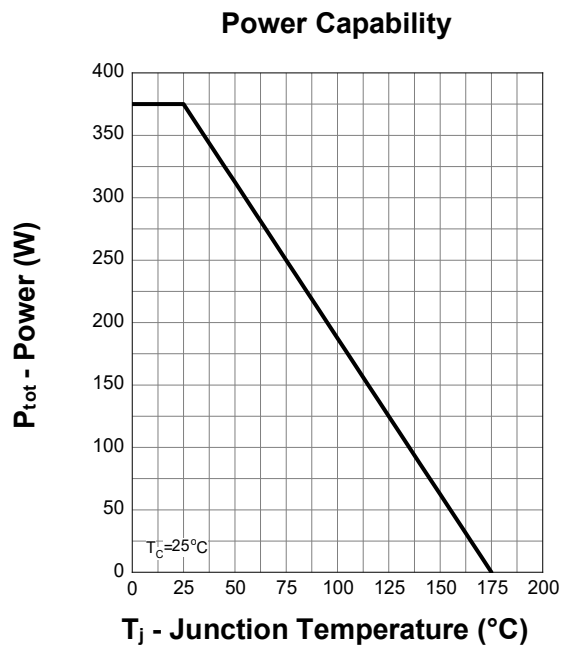


7. Typical Characteristics (cont.)


Output Characteristics

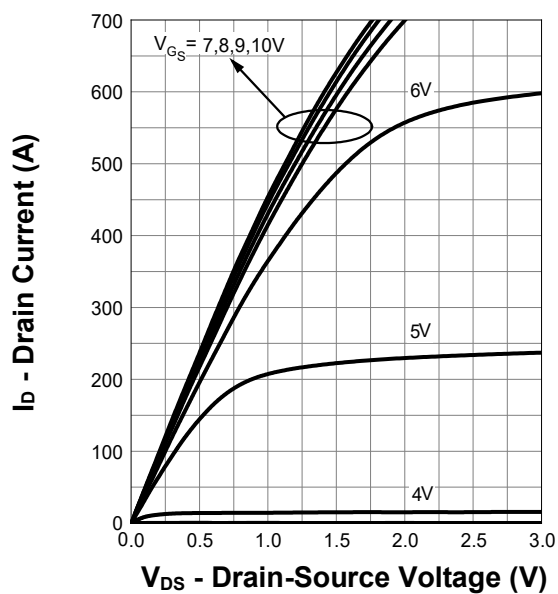


On Resistance

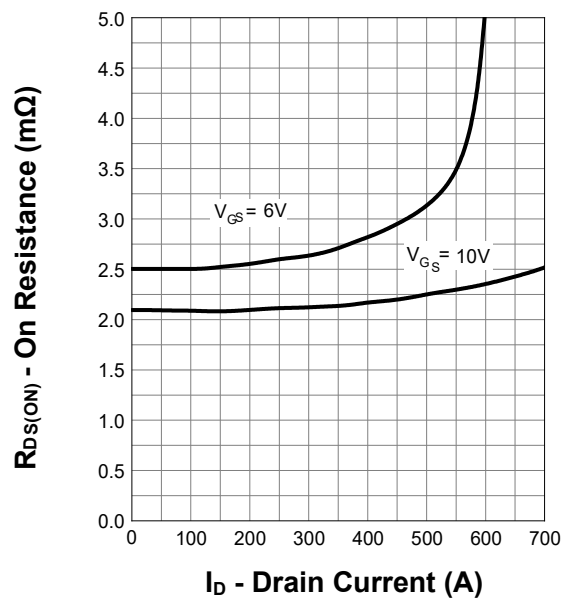





Transfer Characteristics

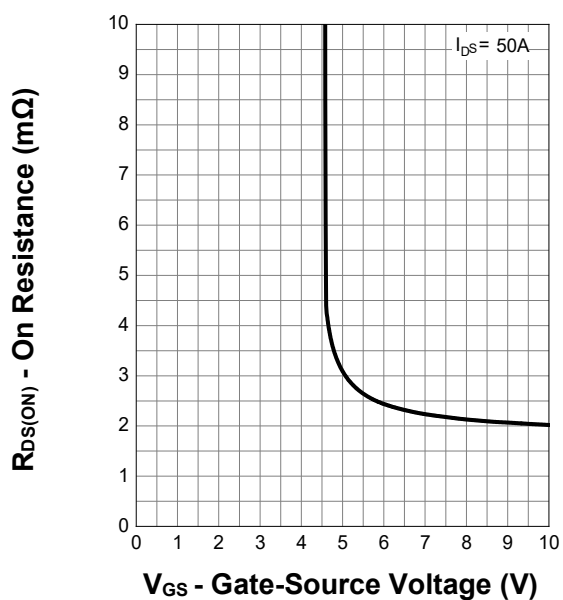

Normalized Threshold Voltage

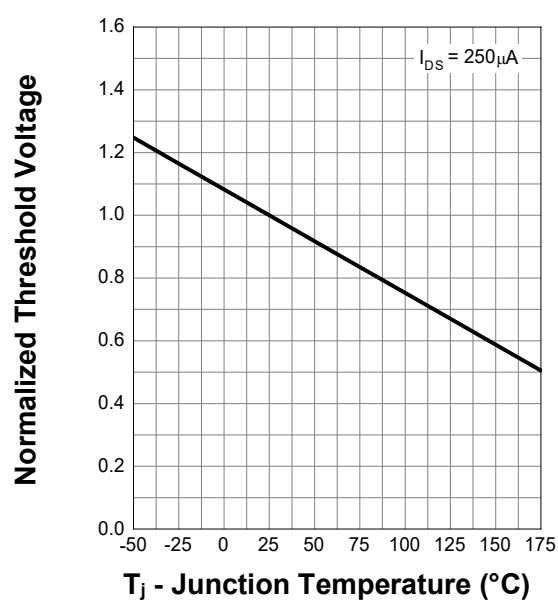


7. Typical Characteristics (cont.)

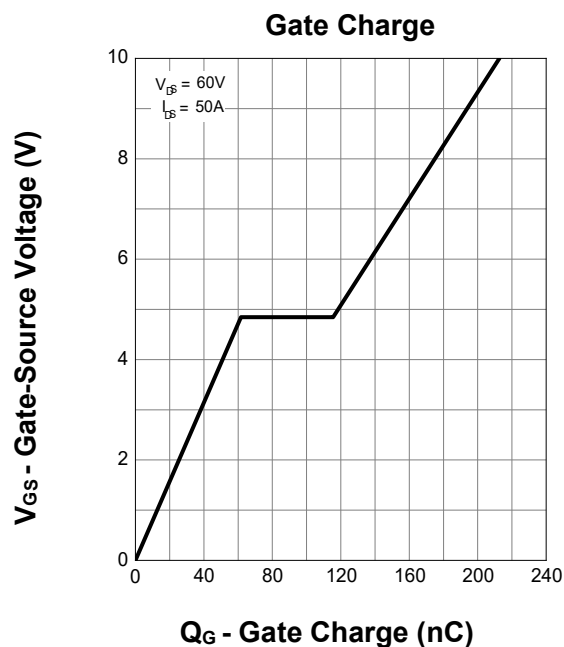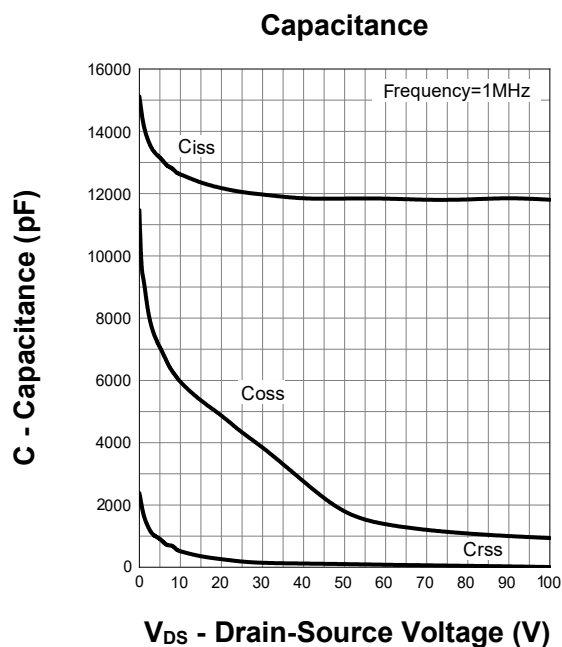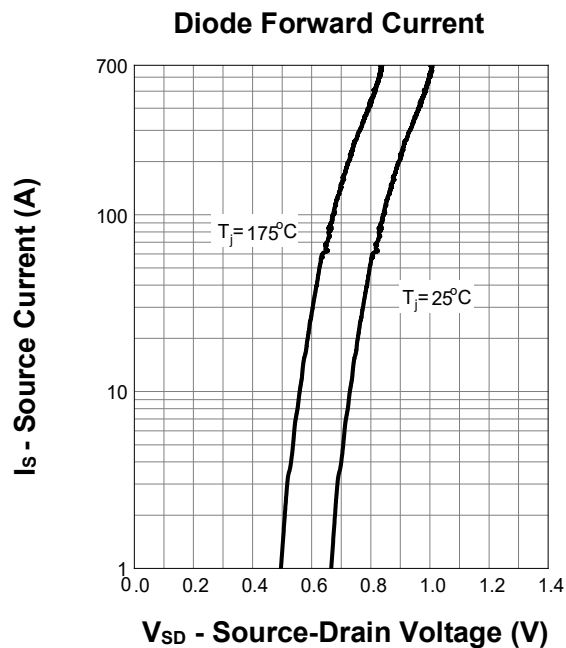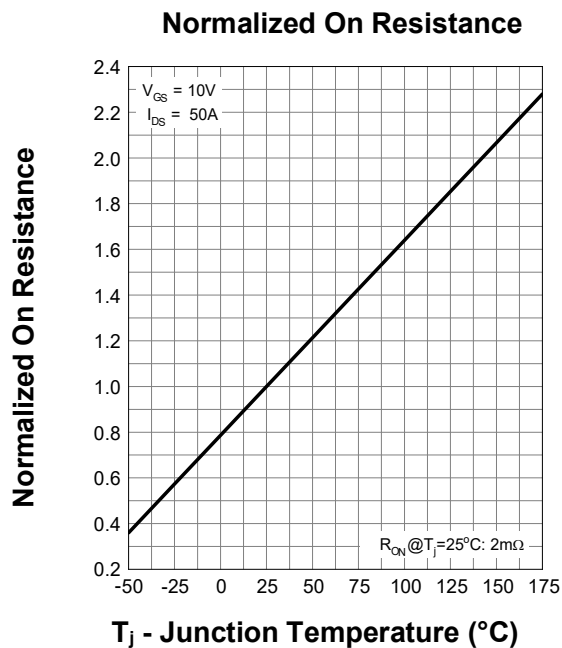

8. Package Dimensions

TOLL-8L Package

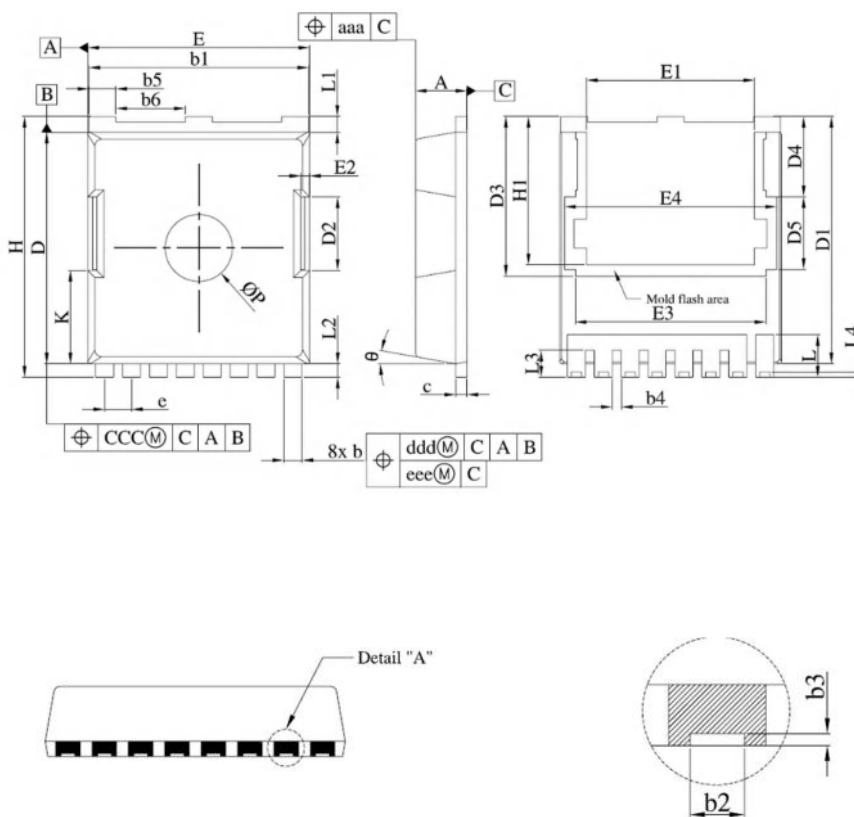

Symbol	Dimensions In Millimeters		
	MIN.	NOM.	MAX.
A	2.20	2.30	2.40
b	0.70	0.80	0.90
b1	9.70	9.80	9.90
b2	0.36	0.45	0.55
b3	0.05	0.10	/
b4	0.30	0.40	0.50
b5	1.10	1.20	1.30
b6	3.00	3.10	3.20
c	0.40	0.50	0.60
D	10.28	10.38	10.55
D1	10.98	11.08	11.18
D2	3.20	3.30	3.40
D3	7.15		
D4	3.59		
D5	3.26		
e	1.10	1.20	1.30
E	9.80	9.90	10.00
E1	7.40	7.50	7.60
E2	0.30	0.40	0.50
E3	8.50		
E4	9.46		
H	11.50	11.68	11.85
H1	6.55	6.65	6.75
K	4.08	4.18	4.28
L	1.60	1.90	2.10
L1	0.50	0.70	0.90
L2	0.50	0.60	0.70
L3	1.00	1.20	1.30
L4	0.13	0.23	0.33
p	2.85	3.00	3.15
θ	10°REF		
aaa	0.20		
ccc	0.20		
ddd	0.25		
eee	0.20		