

N-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- ☒ Surface-mounted package
- ☒ Advanced trench cell design



1.2 Applications

- ☒ LCD TV appliances
- ☒ LCDM appliances
- ☒ High power inverter system

1.3 Quick reference

- ☒ $BV \geq 60 \text{ V}$
- ☒ $P_{tot} \leq 300 \text{ W}$
- ☒ $I_D \leq 150 \text{ A}$
- ☒ $R_{DS(ON)} \leq 1.1\text{m}\Omega @ V_{GS} = 10 \text{ V}$
- ☒ $R_{DS(ON)} \leq 1.5\text{m}\Omega @ V_{GS} = 4.5 \text{ V}$

2. Pin Description

Pin	Description	Simplified Outline	Symbol
1	Gate(G)	 Top View TO-263-7L	
2,3	Source (S)		
4	Drain(D)		
5,6,7	Source (S)		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V_{DS}	Drain-Source Voltage	$T_C = 25\text{ }^{\circ}\text{C}$	-	60	V
V_{GS}	Gate-Source Voltage	$T_C = 25\text{ }^{\circ}\text{C}$	-	± 20	V
$I_{D^{*,***}}$	Drain Current (DC)	$T_C = 25\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	150	A
		$T_C = 100\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	150	A
$I_{DM^{*,**}}$	Drain Current (Pulsed)	$T_C = 25\text{ }^{\circ}\text{C}, V_{GS} = 10\text{ V}$	-	600	A
P_{tot}	Drain power dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	-	300	W
T_{stg}	Storage Temperature		-55	175	$^{\circ}\text{C}$
T_J	Junction Temperature		-	175	$^{\circ}\text{C}$
I_S	Continuous-Source Current	$T_C = 25\text{ }^{\circ}\text{C}$	-	150	A
E_{AS}^*	Single Pulsed Avalanche Energy	$V_{DD} = 50\text{ V}, L = 1\text{ mH}$	-	1058	mJ
$R_{\theta JA}^*$	Thermal Resistance- Junction to Ambient		-	40	$^{\circ}\text{C/W}$
$R_{\theta JC}^*$	Thermal Resistance- Junction to Case		-	0.6	

Notes :

- * Surface Mounted on 1 in² pad area, $t \leq 10\text{ sec}$
- ** Pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$
- *** limited by bonding wire

4. Marking Information

Product Name	Marking
UP011N06D7	011N06 AYWW01 XXXXXX

5. Ordering Code

Product Name	Package	Reel Size	Tape width	Quantity	Note
UP011N06D7	TO263-7L(D2-PAK)			800	

6. Electrical Characteristics ($T_A=25^\circ$ Unless Otherwise Noted)





Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _{DS} = 250 μA	60	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _{DS} = 250 μA	1	-	3	V
I _{DSS}	Drain Leakage Current	V _{DS} = 48 V, V _{GS} = 0 V	-	-	1	μA
I _{GSS}	Gate Leakage Current	V _{GS} = 0 V, V _{GS} = ± 20 V	-	-	±100	nA
R _{DS(ON)} ^a	On-State Resistance	V _{GS} = 10 V, I _{DS} = 30 A	-	0.97	1.1	mΩ
		V _{GS} = 4.5 V, I _{DS} = 20 A	-	1.35	1.5	
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} = 30 A, V _{GS} = 0 V	-	-	1.3	V
t _{rr}	Reverse Recovery Time	I _{DS} = 50 A, V _{GS} = 0 V dI _{SD} /dt = 100 A/μs	-	56	-	nS
Q _{rr}	Reverse Recovery Charge		-	56	-	nC
Dynamic Characteristics ^b						
C _{iss}	Input Capacitance	V _{GS} = 0 V, V _{DS} = 30 V Frequency = 1 MHz	-	7253	-	pF
C _{oss}	Output Capacitance		-	2059	-	
C _{rss}	Reverse Transfer Capacitance		-	50	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} = 30 V, V _{GEN} = 10 V, R _G = 3.9 Ω, R _L = 1Ω, I _{DS} = 30 A	-	15	-	nS
t _r	Turn-on Rise Time		-	65	-	
t _{d(off)}	Turn-off Delay Time		-	162	-	
t _f	Turn-off Fall Time		-	131	-	
Gate Charge Characteristics ^b						
Q _g	Total Gate Charge	V _{DS} = 30 V, V _{GS} = 10 V, I _{DS} = 30 A	-	157	-	nC
Q _{gs}	Gate-Source Charge		-	22	-	
Q _{gd}	Gate-Drain Charge		-	33	-	

Notes :





a : Pulse test ; pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$

b : Guaranteed by design, not subject to production testing





7. Typical Characteristics

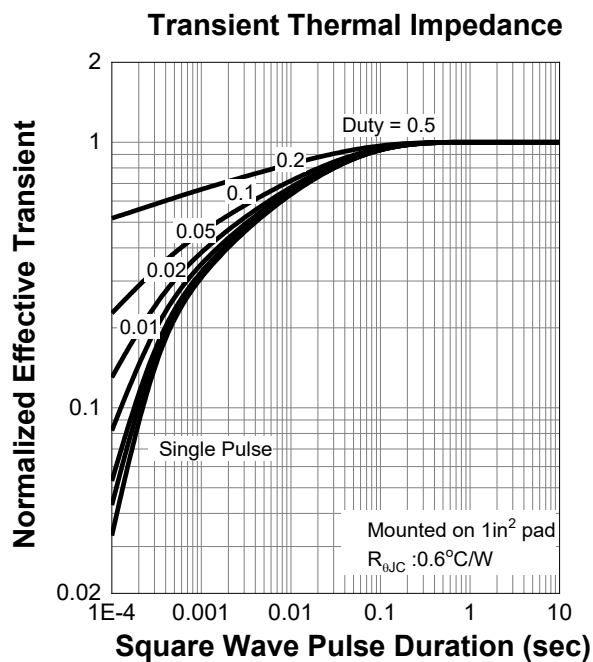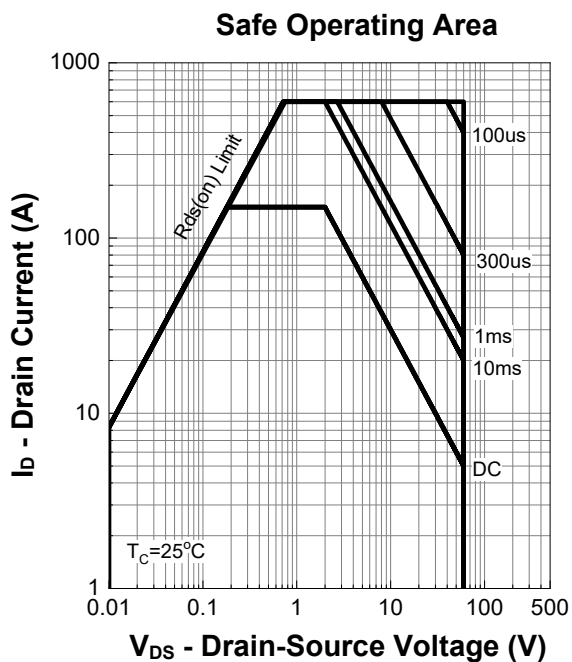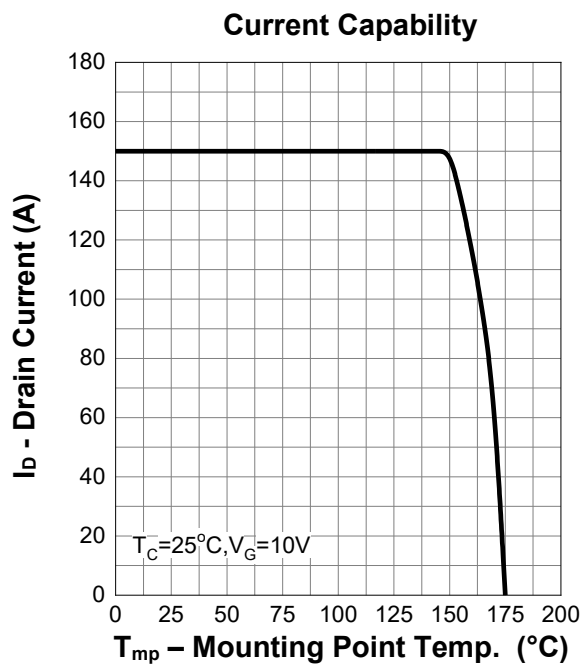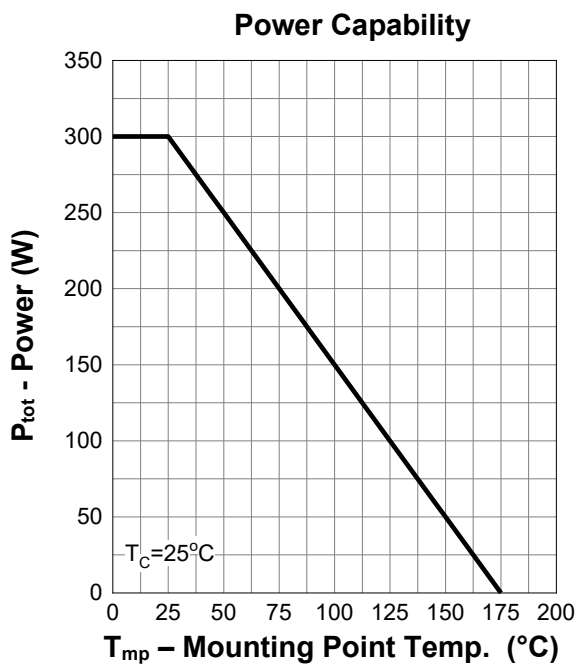

7. Typical Characteristics (cont.)

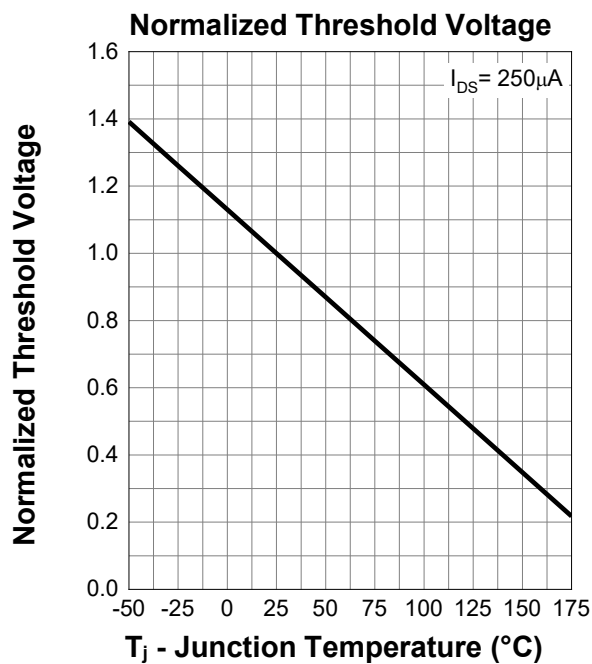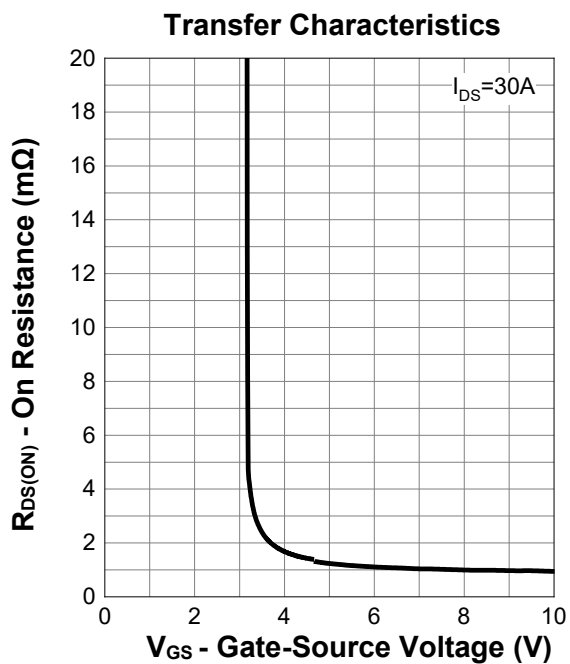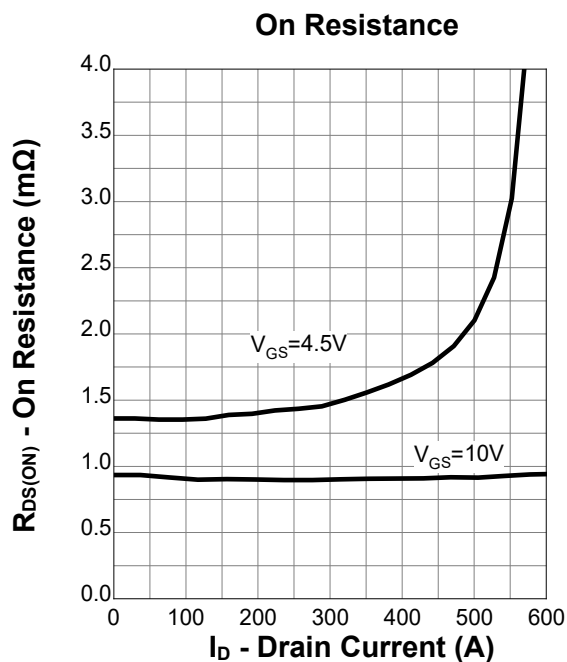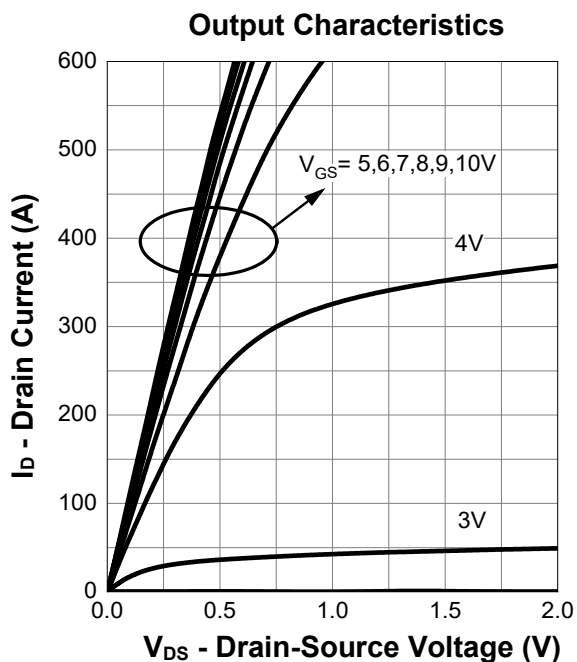


7. Typical Characteristics (cont.)

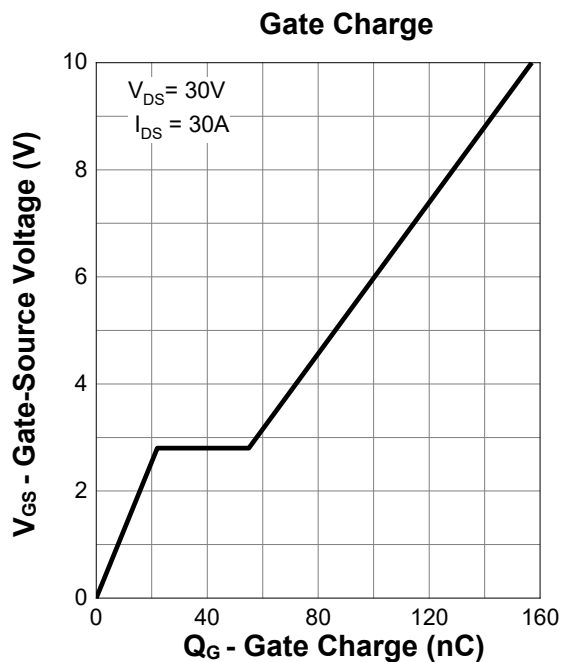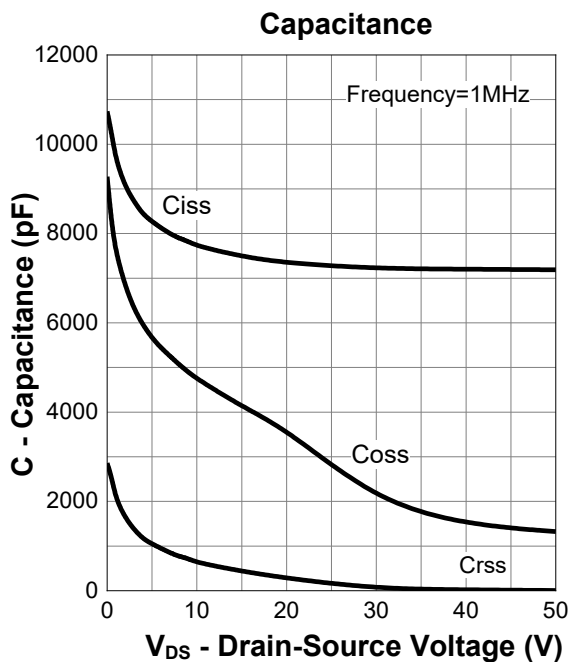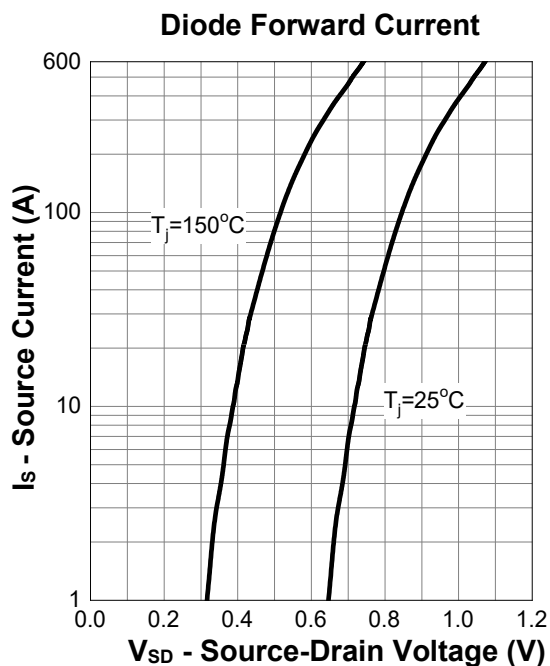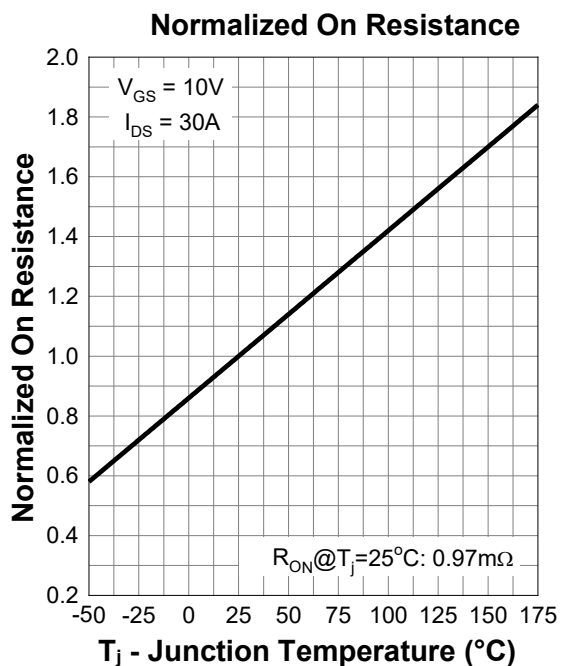

8. Package Dimensions

TO-263-7L Package

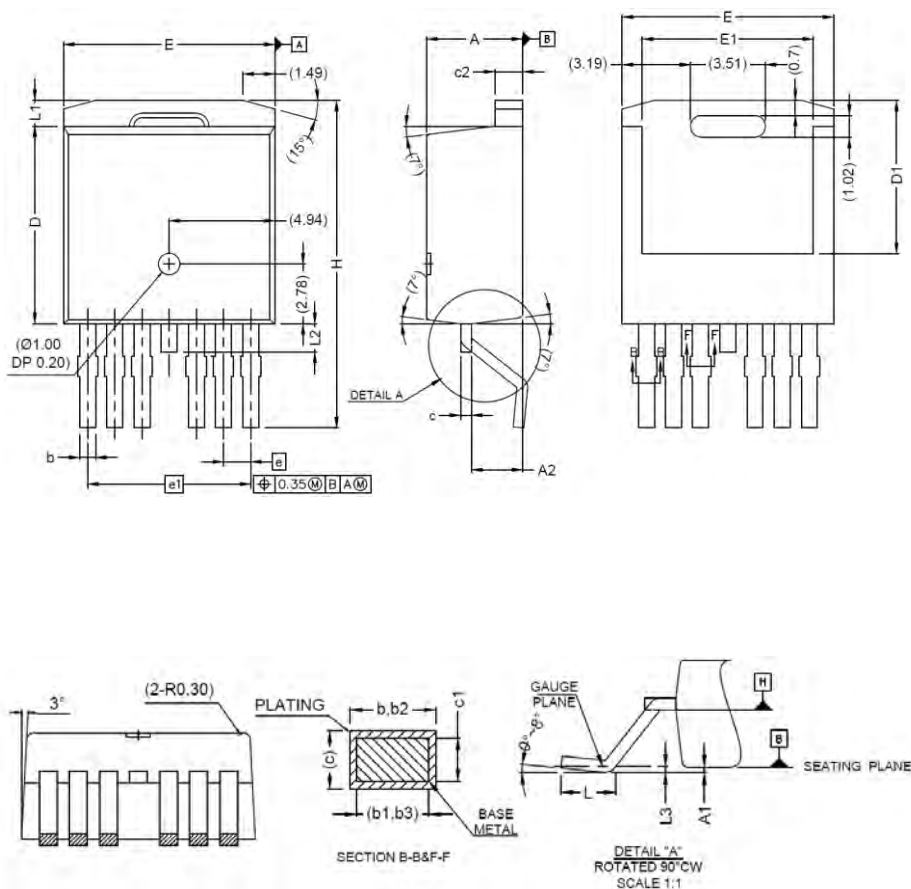

Symbol	Dimensions In Millimeters	
	MIN.	MAX.
A	4.30	4.70
A1	-	0.25
A2	2.20	2.60
b	0.65	0.85
b1	0.65	0.80
b2	0.80	1.00
b3	0.80	0.95
c	0.45	0.60
c1	0.45	0.55
c2	1.25	1.40
D	9.00	9.40
D1	6.86	7.42
E	9.68	10.08
E1	7.70	8.30
e	1.27 BSC	
e1	7.62 BSC	
L	1.78	2.79
L1	-	1.60
L2	-	1.78
L3	0.25BSD	
H	14.61	15.88