

N-Channel Enhancement Mode MOSFET

1. Product Information

1.1 Features

- Surface-mounted package
- Advanced trench cell design



1.2 Applications

- LCD TV appliances
- High power inverter system
- LCDM appliances

1.3 Quick reference

- $BV \geq 60\text{ V}$
- $R_{DS(ON)} \leq 1.1\text{ m}\Omega @ V_{GS} = 10\text{ V}$
- $P_{tot} \leq 136\text{ W}$
- $R_{DS(ON)} \leq 2.2\text{ m}\Omega @ V_{GS} = 4.5\text{ V}$
- $I_D \leq 228\text{ A}$

2. Pin Description

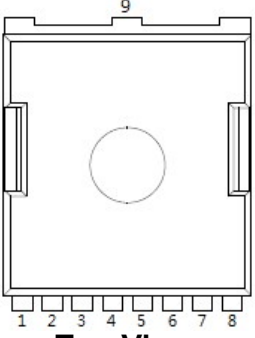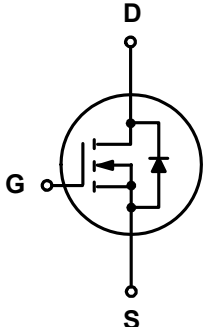Pin	Description	Simplified Outline	Symbol
1	Gate(G)	 <p>Top View TOLL</p>	
2,3,4,5,6,7,8	Source(S)		
9	Drain(D)		

3. Limiting Values

Symbol	Parameter	Conditions	Min	Max	Unit
V _{DS}	Drain-Source Voltage	T _C = 25 °C	-	60	V
V _{GS}	Gate-Source Voltage	T _C = 25 °C	-	± 20	V
I _D *	Drain Current (DC)	T _C = 25 °C, V _{GS} = 10 V	-	228	A
		T _C = 100 °C, V _{GS} = 10 V	-	161	A
I _{DM} *,**	Drain Current (Pulsed)	T _C = 25 °C, V _{GS} = 10 V	-	913	A
P _{tot}	Drain power dissipation	T _C = 25 °C	-	136	W
T _{stg}	Storage Temperature		- 55	175	°C
T _J	Junction Temperature		-	175	°C
I _S	Continuous-Source Current	T _C = 25 °C	-	228	A
E _{AS} *	Single Pulsed Avalanche Energy	V _{DD} = 50 V , L = 1.0 mH	-	1568	mJ
R _{θJA} *	Thermal Resistance- Junction to Ambient		-	55	°C/W
R _{θJC}	Thermal Resistance- Junction to Case		-	1.1	

Notes :

- * Surface Mounted on 1 in² pad area, t ≤ 10 sec
- ** Pulse width ≤ 300 μs, duty cycle ≤ 2 %
- *** Limited by bonding wire

4. Marking Information

Product Name	Marking
UP011N06CT	<div style="display: inline-block; background-color: black; color: white; padding: 2px;">011N06</div> <div style="display: inline-block; background-color: black; color: white; padding: 2px;">YWWXXX</div> <div style="display: inline-block; vertical-align: middle;">YWWXXX: Date Code</div>

5. Ordering Code

Product Name	Package	Reel Size	Tape width	Quantity	Note
UP011N06CT	TOLL			2000	

6. Electrical Characteristics (T_A = 25 °C Unless Otherwise Noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _{DS} = 250 μA	60	-	-	V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _{DS} = 250 μA	1.5	2.5	3.5	V
I _{DSS}	Drain Leakage Current	V _{DS} = 48 V, V _{GS} = 0 V	-	-	1	μA
I _{GSS}	Gate Leakage Current	V _{GS} = 0 V, V _{GS} = ± 20 V	-	-	± 100	nA
R _{DS(ON)} ^a	On-State Resistance	V _{GS} = 10 V, I _{DS} = 50 A	-	1.0	1.1	mΩ
		V _{GS} = 4.5 V, I _{DS} = 30 A	-	1.9	2.2	
Diode Characteristics						
V _{SD} ^a	Diode Forward Voltage	I _{SD} = 50 A, V _{GS} = 0 V	-	-	1.3	V
t _{rr}	Reverse Recovery Time	I _{DS} = 50 A, V _{GS} = 0 V dI _{SD} /dt = 100 A/μs	-	62	-	nS
Q _{rr}	Reverse Recovery Charge		-	62	-	nC
Dynamic Characteristics^b						
C _{iss}	Input Capacitance	V _{GS} = 0 V, V _{DS} = 30 V Frequency = 1 MHz	-	7460	-	pF
C _{oss}	Output Capacitance		-	3168	-	
C _{rss}	Reverse Transfer Capacitance		-	60	-	
t _{d(on)}	Turn-on Delay Time	V _{DS} = 30 V, V _{GEN} = 10 V, R _G = 3.9 Ω, R _L = 0.6 Ω, I _{DS} = 50 A	-	19	-	nS
t _r	Turn-on Rise Time		-	71	-	
t _{d(off)}	Turn-off Delay Time		-	106	-	
t _f	Turn-off Fall Time		-	84	-	
Gate Charge Characteristics^b						
Q _g	Total Gate Charge	V _{DS} = 30 V, V _{GS} = 10 V, I _{DS} = 50 A	-	136	-	nC
Q _{gs}	Gate-Source Charge		-	31	-	
Q _{gd}	Gate-Drain Charge		-	33	-	


Notes :

a : Pulse test ; pulse width ≤ 300 μs, duty cycle ≤ 2%


b : Guaranteed by design, not subject to production testing

7. Typical Characteristics


Power Capability

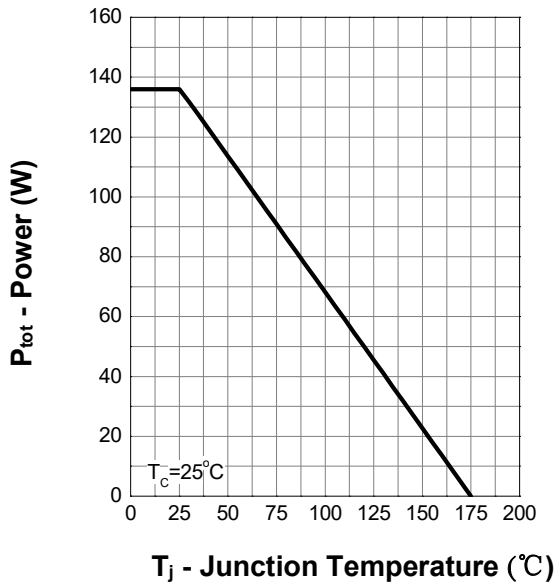


Current Capability

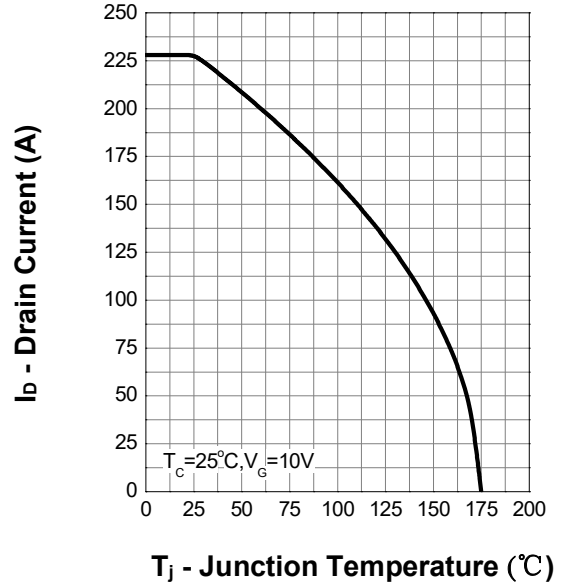

Safe Operation Area

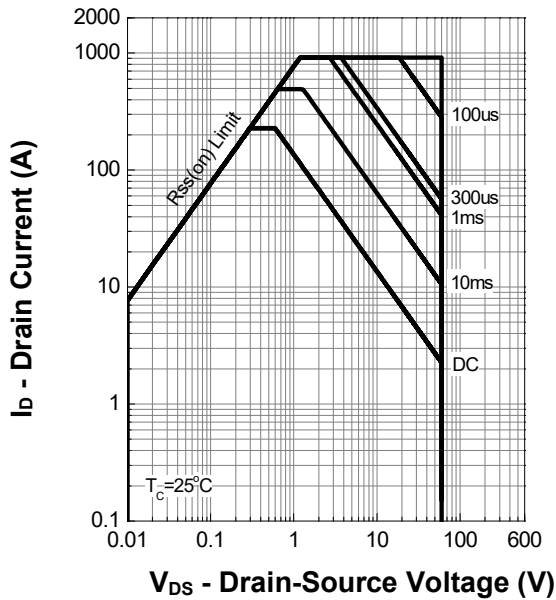


Thermal Transient Impedance

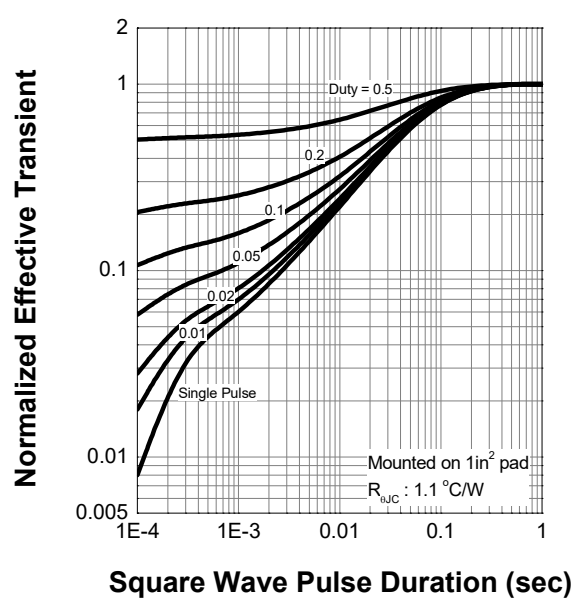


7. Typical Characteristics (cont.)


Output Characteristics

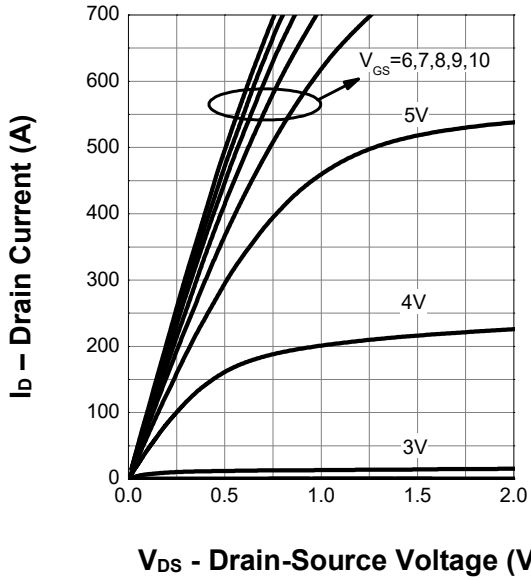


Drain-Source On Resistance

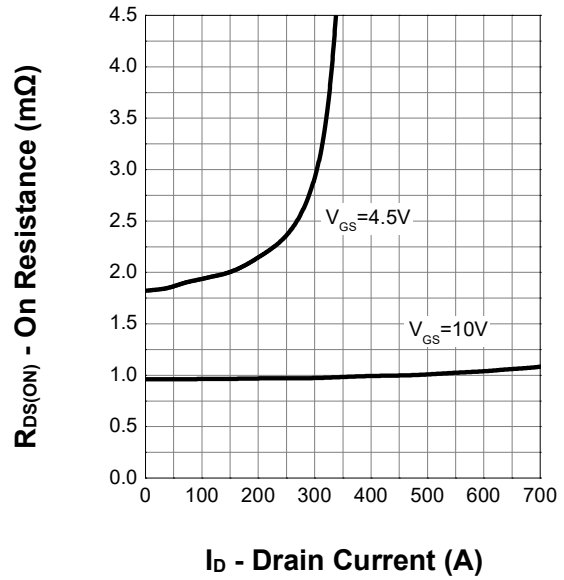

Transfer Characteristics

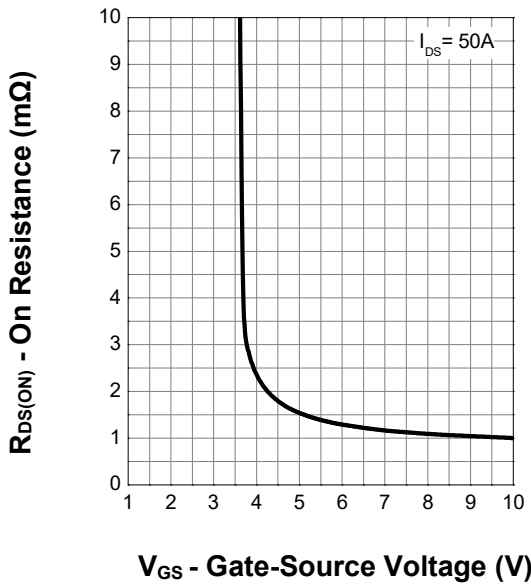


Gate Threshold Voltage

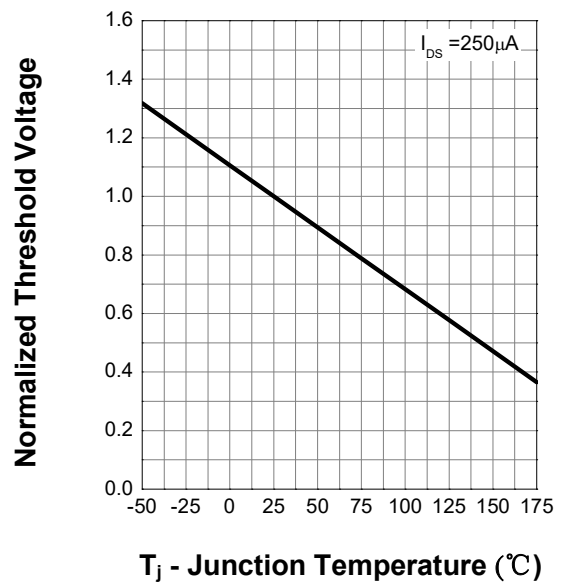


7. Typical Characteristics (cont.)


Drain-Source On Resistance

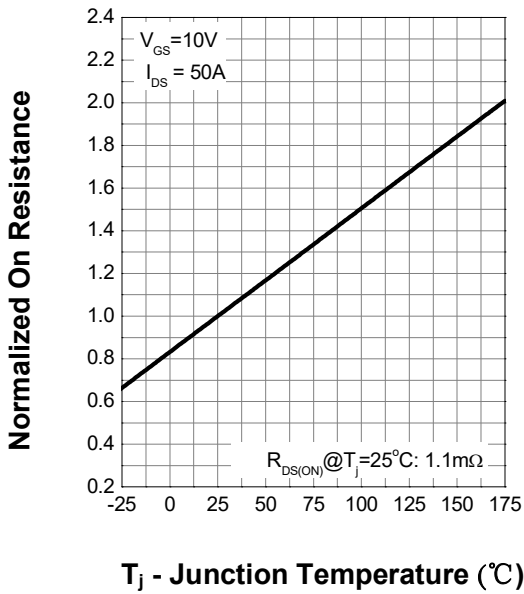


Body Diode Characteristics

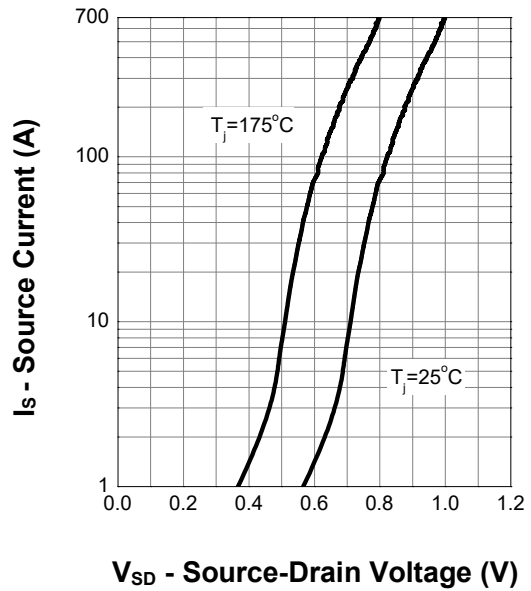

Capacitance

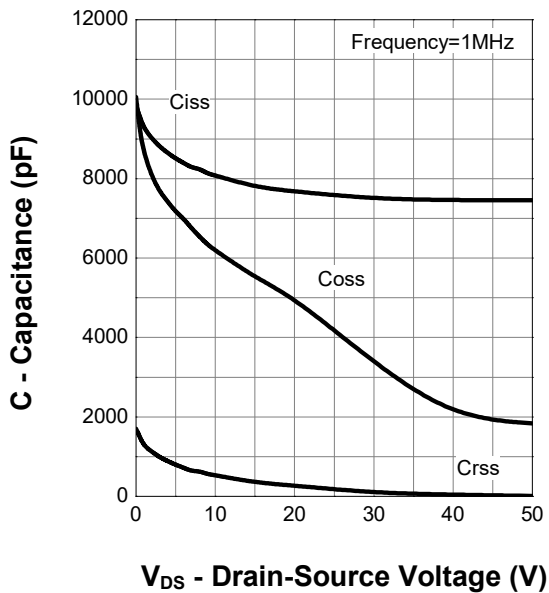


Gate Charge

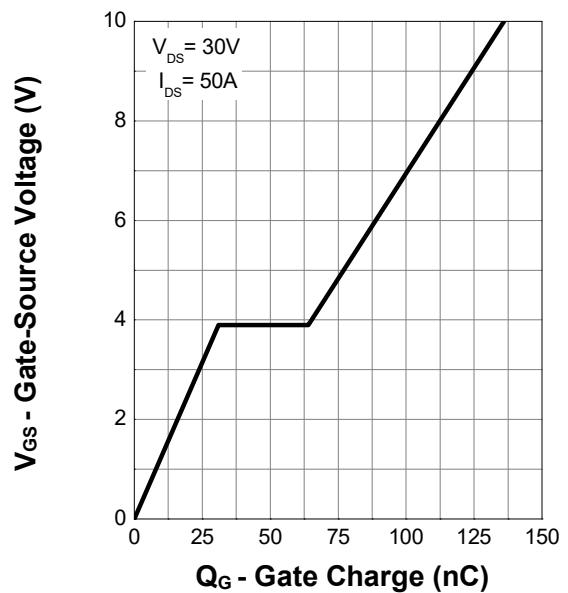

8. Package Dimensions

TOLL-8L Package

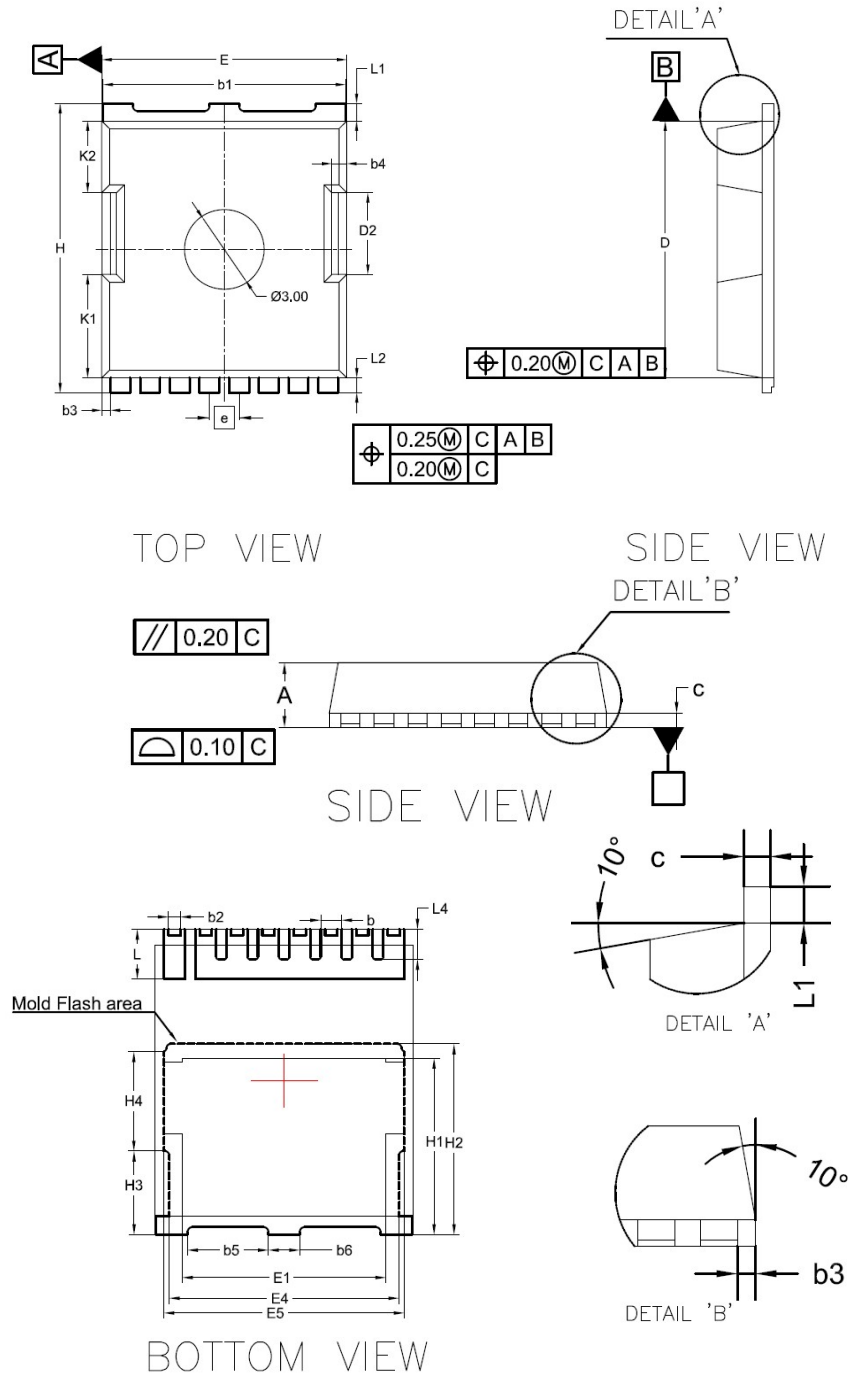

8. Package Dimensions

TOLL-8L Package

Symbol	Dimensions In Millimeters			Dimensions In INCHES		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	2.200	2.300	2.400	0.087	0.091	0.094
c	0.492	0.500	0.508	0.019	0.020	0.021
D	10.280	10.380	10.480	0.405	0.409	0.413
E	9.800	9.900	10.000	0.386	0.390	0.394
e	1.20 BSC			0.047 BSC		
H	11.580	11.680	11.780	0.456	0.460	0.464
H1	6.650	6.750	6.850	0.262	0.266	0.270
H2	7.300			0.287		
H3	3.200			0.126		
H4	3.800			0.150		
K1	4.180			0.165		
K2	2.900			0.114		
D2	3.300			0.130		
b	0.700	0.800	0.900	0.028	0.031	0.035
b1	9.700	9.800	9.900	0.382	0.386	0.390
b2	0.420	0.460	0.500	0.017	0.018	0.020
b3	0.350			0.014		
b4	0.600			0.024		
b5	3.100			0.122		
b6	1.200			0.047		
L	1.700	1.900	2.100	0.067	0.075	0.083
L1	0.700			0.028		
L2	0.600			0.024		
L4	1.050	1.150	1.250	0.041	0.045	0.049
L5	0.500	0.600	0.700	0.020	0.024	0.028
E1	7.800			0.310		
E4	8.800			0.350		
E5	9.200			0.360		